



APC Easy UPS nepārtrauktas barošanas avots (UPS) Line-Interactive 1,2 kilovoltampērs 650 W 6 Maiņstrāvas izvade (-s)

Zīmols : APC

Preces kods: BVX1200LI

Modeļa nosaukums : Easy UPS


APC Easy UPS. UPS topoloģija: Line-Interactive, Izejas jaudas kapacitāte (VA): 1,2 kilovoltampērs, Izejas jauda: 650 W. Maiņstrāvas izeju tipi: C13 uzmava, Jaudas spraudnis: C14 uzmava, Izeju skaits: 6 Maiņstrāvas izvade (-s). Baterijas tehnoloģija: Noslēgts svina skābju (VRLA), Baterijas uzlādes laiks: 6 h. Produkta krāsa: Melns, Kabeļa garums: 1,2 m. Sertifikācija: CB , CE, EN/IEC 62040-1, EN/IEC 62040-2



Īpašības		Dizains	
UPS topoloģija *	Line-Interactive	Produkta krāsa *	Melns
Izejas jaudas kapacitāte (VA) *	1,2 kilovoltampērs	LED indikatori	✓
Izejas jauda *	650 W	Ārējās vides apstākļi	
Viļņa forma *	Sinuss	Darbības temperatūras amplitūda (T-T)	0 - 40 °C
Ievades darbības spriegums (min) *	140 V	Uzglabāšanas temperatūras amplitūda (T-T)	-10 - 40 °C
Ievades darbības spriegums (maks) *	300 V	Darbības relatīvā mitruma amplitūda	0 - 95%
Ieejas frekvence *	50/60 Hz	Ekspluatācijas augstums	0 - 914,4 m
Izejas frekvence	50/60 Hz	Ne-operacionālais augstums	0 - 914,4 m
Automātiskā sprieguma regulēšana (AVR)	✓	Sertifikāti	
Sprieguma plūdzlāde	273 J	Sertifikācija	CB , CE, EN/IEC 62040-1, EN/IEC 62040-2
Atbildes laiks	4 ms	Iepakojuma saturs	
Skaņas signalizācija	✓	Pievienoti kabeli	Strāvas ievades kabelis
Savienojamība		Vadības karte iekļauta	✗
Maiņstrāvas izeju tipi	C13 uzmava	Svars&dimensijas	
Jaudas spraudnis	C14 uzmava	Platums	140 mm
Izeju skaits	6 Maiņstrāvas izvade (-s)	Dziļums	390 mm
SmartSlot	✗	Augstums	190 mm
SmartConnect ports	✗	Svars	7,5 kg
Baterija		Informācija par iepakojumu	
Baterijas tehnoloģija	Noslēgts svina skābju (VRLA)	Iepakojuma platums	235 mm
Baterijas uzlādes laiks	6 h	Iepakojuma dziļums	495 mm
Aukstais starts	✓	Iepakojuma augstums	297 mm
Dizains		Iepakojuma svars	8,5 kg
Kabeļa garums	1,2 m		

Logistiskie dati

Harmonizētās sistēmas (HS) kods 85078000

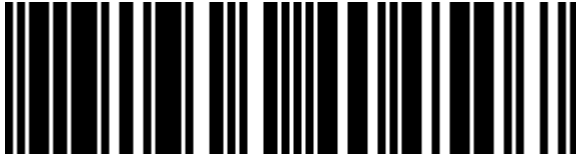

0731304404507



731304404507



7313044045078

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.