



APC Easy UPS nepārtrauktas barošanas avots (UPS) Line-Interactive 2,2 kilovoltampērs 1200 W 4 Maiņstrāvas izvade (-s)

Zīmols : APC

Preces kods: BVX2200LI-GR


Modeļa nosaukums : Easy UPS

APC Easy UPS. UPS topoloģija: Line-Interactive, Izejas jaudas kapacitāte (VA): 2,2 kilovoltampērs, Izejas jauda: 1200 W. Maiņstrāvas izeju tipi: Tips F, Jaudas spraudnis: Tips F, Izeju skaits: 4 Maiņstrāvas izvade (-s). Baterijas tehnoloģija: Svina-skābes, Akumulatora ietilpība: 9 ampērstunda, Baterijas spriegums: 24 V. Produkta krāsa: Melns, Kabeļa garums: 1,2 m, International Protection (IP) code: IP20. Sertifikācija: CE, EN/IEC 62040-1, EN/IEC 62040-2



Īpašības		Dizains	
UPS topoloģija *	Line-Interactive	Kabeļa garums	1,2 m
Izejas jaudas kapacitāte (VA) *	2,2 kilovoltampērs	Produkta krāsa *	Melns
Izejas jauda *	1200 W	LED indikatori	✓
Viļņa forma *	Sinuss	International Protection (IP) code	IP20
Ievades darbības spriegums (min) *	140 V	Ārējās vides apstākļi	
Ievades darbības spriegums (maks) *	300 V	Darbības temperatūras amplitūda (T-T)	0 - 40 °C
Ieejas frekvence *	50/60 Hz	Uzglabāšanas temperatūras amplitūda (T-T)	-15 - 40 °C
Izejas frekvence	50/60 Hz	Darbības relatīvā mitruma amplitūda	0 - 95%
Automātiskā sprieguma regulēšana (AVR)	✓	Ekspluatācijas augstums	0 - 3000 m
Sprieguma plūdzlāde	273 J	Ne-operacionālais augstums	0 - 3000 m
Atbildes laiks	6 ms	Sertifikāti	
Skaņas signalizācija	✓	Sertifikācija	CE, EN/IEC 62040-1, EN/IEC 62040-2
Savienojamība		Iepakojuma saturs	
Maiņstrāvas izeju tipi	Tips F	Pievienoti kabeli	Strāvas ievades kabelis
Jaudas spraudnis	Tips F	Vadības karte iekļauta	✗
Izeju skaits	4 Maiņstrāvas izvade (-s)	Svars&dimensijas	
SmartSlot	✗	Platums	140 mm
SmartConnect ports	✗	Dziļums	390 mm
Baterija		Augstums	190 mm
Baterijas tehnoloģija	Svina-skābes	Svars	12,2 kg
Akumulatora ietilpība	9 ampērstunda	Informācija par iepakojumu	
Baterijas spriegums	24 V	Iepakojuma platums	495 mm
Akumulatora darbības laiks (maks.)	3 gads(i)		
Baterijas uzlādes laiks	8 h		

Baterija		Informācija par iepakojumu	
Aukstais starts	✓	lepkojuma dziļums	235 mm
		lepkojuma augstums	297 mm
		lepkojuma svārs	13,2 kg
Logistiskie dati			
		Harmonizētās sistēmas (HS) kods	85078000

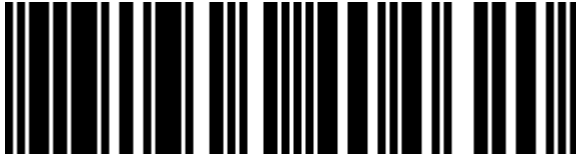

0731304404620



731304404620

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.