



**APC BVX700LI uninterruptible power supply (UPS) Line-Interactive**  
**0.7 kVA 360 W 4 AC outlet(s)**

**Brand :** APC

**Product code:** BVX700LI

**Product name :** BVX700LI


700VA, 230V, AVR, 4x IEC Sockets, Black

APC BVX700LI. UPS topology: Line-Interactive, Output power capacity: 0.7 kVA, Output power: 360 W. AC outlet types: C13 coupler, Power plug: C14 coupler, AC outlets quantity: 4 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 7 Ah, Battery voltage: 12 V. Form factor: Compact, Product colour: Black, International Protection (IP) code: IP20. Certification: CB, CE, EN/IEC 62040-1, EN/IEC 62040-2



| Features                           |                                                                               | Battery                            |                                        |
|------------------------------------|-------------------------------------------------------------------------------|------------------------------------|----------------------------------------|
| UPS topology *                     | Line-Interactive                                                              | Battery voltage                    | 12 V                                   |
| Output power capacity *            | 0.7 kVA                                                                       | Battery life (max)                 | 2 year(s)                              |
| Output power *                     | 360 W                                                                         | Battery recharge time              | 8 h                                    |
| Waveform *                         | Sine                                                                          | Cold start                         | ✓                                      |
| Input operation voltage (min) *    | 170 V                                                                         | <b>Design</b>                      |                                        |
| Input operation voltage (max) *    | 280 V                                                                         | Form factor *                      | Compact                                |
| Input frequency *                  | 50/60 Hz                                                                      | Product colour *                   | Black                                  |
| Output operation voltage (min)     | 230 V                                                                         | LED indicators                     | ✓                                      |
| Output operation voltage (max)     | 230 V                                                                         | International Protection (IP) code | IP20                                   |
| Output frequency                   | 50/60 Hz                                                                      | <b>Operational conditions</b>      |                                        |
| Output frequency regulation        | 0.5 Hz                                                                        | Operating temperature (T-T)        | 0 - 40 °C                              |
| Output voltage regulation          | 10%                                                                           | Storage temperature (T-T)          | -15 - 40 °C                            |
| Automatic Voltage Regulation (AVR) | ✓                                                                             | Operating relative humidity (H-H)  | 0 - 95%                                |
| Surge energy rating                | 273 J                                                                         | Operating altitude                 | 0 - 3000 m                             |
| Response time                      | 6 ms                                                                          | Non-operating altitude             | 0 - 3000 m                             |
| Input power factor                 | 0.51                                                                          | <b>Certificates</b>                |                                        |
| Noise level                        | 40 dB                                                                         | Certification                      | CB, CE, EN/IEC 62040-1, EN/IEC 62040-2 |
| Surge protection                   | ✓                                                                             | <b>Packaging content</b>           |                                        |
| Audible alarm(s)                   | ✓                                                                             | Cables included                    | Input power cable                      |
| Audible alarm modes                | Alarm when on battery, Battery replacement, Low battery alarm, Overload alarm | Management card included           | ✗                                      |
| <b>Ports &amp; interfaces</b>      |                                                                               | Manual                             | ✓                                      |
| AC outlet types                    | C13 coupler                                                                   | <b>Weight &amp; dimensions</b>     |                                        |
| Power plug                         | C14 coupler                                                                   | Width                              | 31 mm                                  |
| AC outlets quantity                | 4 AC outlet(s)                                                                | Depth                              | 138 mm                                 |
| SmartSlot                          | ✗                                                                             | Height                             | 98 mm                                  |
| SmartConnect port                  | ✗                                                                             |                                    |                                        |

| Battery            |                         | Weight & dimensions         |          |
|--------------------|-------------------------|-----------------------------|----------|
| Battery technology | Sealed Lead Acid (VRLA) | Weight                      | 4.5 kg   |
| Battery capacity   | 7 Ah                    | Packaging data              |          |
|                    |                         | Package width               | 222 mm   |
|                    |                         | Package depth               | 346 mm   |
|                    |                         | Package height              | 142 mm   |
|                    |                         | Package weight              | 4.5 kg   |
|                    |                         | Logistics data              |          |
|                    |                         | Harmonized System (HS) code | 85078000 |

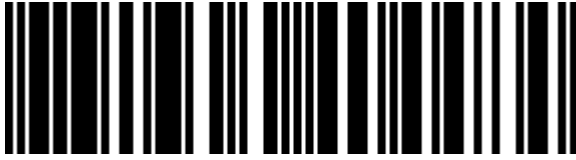

0731304404484



731304404484

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.