



TP-Link INSIGHT S385 Bullet IP security camera Outdoor 3840 x 2160 pixels Wall



Brand : TP-Link

Product code: INSIGHT S385(4MM)

Product name : INSIGHT S385

- 4K (8MP) Ultra HD and 24h Full-Color
- People & Vehicle Analytics
- Human & Vehicle Classification
- Smart Detection
- Smart Video Enhancement Technology
- Active Defense and Two-Way Audio
- IP67 Waterproof
- H.265+ Compression Technology
- 12V DC/PoE

VIGI 8MP Outdoor Full-Color Bullet Network Camera, 1/2.7", 1/3 to 1/10000 s, F1.6, 3840 x 2160, CBR, VBR, BLC/3D DNR/HLC/SmartIR, 120 dB, 12V DC $\pm$ 5%, Max. 10.5 W, 5.5 mm Coaxial Power Plug, PoE: 802.3af/at, class 0, Max. 11.5 W, IP67, 184 x 74 x 74 mm, 0.525 kg, White

TP-Link INSIGHT S385. Type: IP security camera, Placement supported: Outdoor, Connectivity technology: Wired. Mounting type: Wall, Product colour: White, Form factor: Bullet. Lens viewing angle, horizontal: 91.5°, Lens viewing angle, vertical: 46.1°, Lens viewing angle, diagonal: 109.6°. Sensor type: CMOS, Optical sensor size: 25.4 / 2.7 mm (1 / 2.7"). Detect distance: 107 m, Observe distance: 44 m, Recognize distance: 21 m

Performance		Audio	
Type *	IP security camera	Audio output channels	1.0 channels
Placement supported *	Outdoor	Audio formats supported	G.711 A-law
Connectivity technology *	Wired	Sample rate	8 kHz
Maximum operating distance	107 m	Built-in microphone	✓
Wide Dynamic Range (WDR)	✓	Number of microphones	1
Day/night mode	✓	Bit rate range	0 - 64 Kbit/s
Infrared (IR) cut-off filter	✓	Network	
Remote viewing	✓	Ethernet LAN *	✓
Dynamic range	120 dB	Networking standards	IEEE 802.3af, IEEE 802.3at
Design		Supported network protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS, FTP/SFTP, RTP, IPv4, IPv6, ARP
Form factor *	Bullet	Wi-Fi *	✗
Mounting type *	Wall	Bluetooth *	✗
Product colour *	White	Live view	✓
Housing material	Metal	Storage	
Protection features	Waterproof	Compatible memory cards	MicroSD (TransFlash)
International Protection (IP) code	IP67	Maximum memory card size	512 GB
Weatherproof	✓	Ports & interfaces	
Camera		Ethernet LAN (RJ-45) ports	1
Minimum illumination	0 lx	DC-in jack	✓
Lens viewing angle, horizontal	91.5°	Security	
Lens viewing angle, vertical	46.1°	Built-in siren	✓
Lens viewing angle, diagonal	109.6°	Password protection	✓
Tilt angle range	0 - 90°	Video motion detection	✓
Camera shutter speed	1/3 to 1/10000	IP address filtering	✓
Image sensor		HTTPS encryption	✓
Optical sensor size	25.4 / 2.7 mm (1 / 2.7")	Alert notification type	Push notification
Progressive scan	✓		
Sensor type *	CMOS		


Lens system		Security	
Detect distance	107 m	Motion sensor	✓
Observe distance	44 m	Mirror	✓
Recognize distance	21 m	Digest authentication	✓
Fixed focus	✓	Management features	
Maximum aperture number	1.6	Web-based management	✓
Identify distance	11 m	Web browser	✓
Fixed focal length	4 mm	Cloud-managed *	✓
Night vision		Reset button	✓
Night vision *	✓	Power	
LED type	IR/White	Power source type *	DC, PoE
Video		Power consumption (max)	10.5 W
Maximum resolution *	3840 x 2160 pixels	Power consumption (Power over Ethernet (PoE))	11.5 W
Total megapixels *	8 MP	DC output voltage	12
Video compression formats	H.264, H.264+, H.265, H.265+ 1280 x 720 (HD 720), 1920 x 1080 (HD 1080), 2048 x 1280, 2304 x 1296, 2560 x 1440, 3840 x 2160	Operational conditions	
Supported graphics resolutions		Operating temperature (T-T)	-30 - 60 °C
Video recording	✓	Storage temperature (T-T)	-40 - 60 °C
Image quality adjustment	Brightness, Contrast, Mirror, Saturation, Sharpness	Operating relative humidity (H-H)	0 - 95%
Bit rate control	Constant Bit Rate (CBR)/Variable Bit Rate (VBR)	Storage relative humidity (H-H)	0 - 95%
Bit rate	Main Stream: 256 Kbps to 8 Mbps, Sub-Stream: 64 Kbps to 512 Kbps	Weight & dimensions	
Back Light Compensation (BLC)	✓	Width	74 mm
Highlight Compensation (HLC)	✓	Height	74 mm
Digital Wide Dynamic Range (DWDR)	✓	Length	184 mm
Audio		Weight	525 g
Built-in speaker(s)	✓	Packaging data	
Audio system	2-way	Package type	Box
Audio input channels	1.0 channels	Packaging content	
		Number of cameras *	1
		Mounting kit	✓
		Screws included	✓
		Drilling template included	✓
		Manual	✓




0810142823975



810142823975

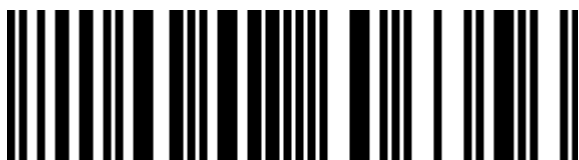

1210002606356

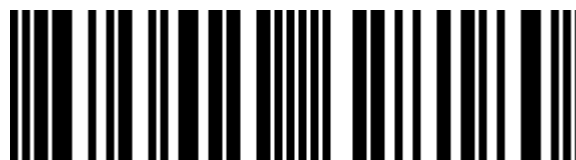

8885020628180

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.