



APC Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card, Extended runtime, W/ rail kit, 6-year warranty



Brand : APC

Product code: SRT5KRMXLI-6W

Product name : Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card, Extended runtime, W/ rail kit, 6-year warranty


Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card, Extended runtime, W/ rail kit, 6-year warranty

[APC Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card, Extended runtime, W/ rail kit, 6-year warranty:](#)

This APC Smart-UPS is designed for IT professionals or network administrators to maintain business uptime and continuity. This 5kVA on-line 3U rackmount UPS provides pure sine wave power and extended runtime to support critical electronics during power disruptions. It comes with Hard Wire 3-wire (1P+N+E) input, 6x IEC 320 C13 and 4x IEC 320 C19 outlets, and 2x IEC jumper cables. The UPS has an embedded Network Management Card for UPS network-based monitoring and management. The UPS comes with PowerChute Network Shutdown that provides graceful shutdown of physical servers, virtual machines, and HCI clusters. It has an additional SmartSlot for optional accessory card such as Dry Contact I/O card. The UPS can connect to EcoStruxure IT or third-party centralized management platforms. The UPS has a 6-year warranty and comes with a built-in lead-acid battery.

Features		Battery	
UPS topology *	Double-conversion (Online)	Replacement battery cartridge	APCRBC140
Output power capacity *	5 kVA	Design	
Output power *	4500 W	Form factor *	Rackmount
Waveform *	Sine	Rack capacity	3U
Input operation voltage (min) *	160 V	Product colour *	Black
Input operation voltage (max) *	275 V	Display type	LCD
Input frequency *	40 - 70 Hz	International Protection (IP) code	IP20
Output operation voltage (min)	220 V	Operational conditions	
Output operation voltage (max)	240 V	Operating temperature (T-T)	0 - 40 °C
Output frequency regulation	50/60 Hz	Storage temperature (T-T)	-15 - 45 °C
Surge energy rating	480 J	Operating relative humidity (H-H)	0 - 95%
Efficiency	94.1%	Storage relative humidity (H-H)	0 - 95%
Crest factor	3:1	Operating altitude	0 - 3000 m
Emergency Power Off (EPO)	✓	Non-operating altitude	0 - 15000 m
Output voltage Total Harmonic Distortion (THD)	3%	Certificates	
Noise level	55 dB	Compliance certificates	RoHS
Surge protection	✓	Certification	REACH, CE, CE Mark, EAC, EN/IEC 62040-1, EN/IEC 62040-2, IRAM, NOM, VDE
Audible alarm(s)	✓	Packaging content	
Auto-restart	✓	Rack mount kit	✓
Ports & interfaces		Management card included	✓
AC outlet types	C13 coupler, C19 coupler	Quick installation guide	✓
Power plug	Hardwire	Sustainability	
AC outlets quantity	10 AC outlet(s)	Sustainability certificates	ENERGY STAR
Number of output IEC jumpers	2	Weight & dimensions	
USB port	✓	Width	432 mm
Serial interface	✓	Depth	719 mm
Serial interface type	RJ-45	Height	130 mm
SmartSlot	✓	Weight	54.4 kg
SmartConnect port	✗		

Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Bracket	✓
Battery capacity	845 VAh	Temperature sensor	✓
Typical backup time at full load	4 min	Warranty card	✓
Typical backup time at half load	11.8 min	Package width	610 mm
Battery life (max)	5 year(s)	Package depth	960 mm
Battery recharge time	1.5 h	Package height	330 mm
Hot-swap battery	✓	Package weight	66.9 kg
Automatic battery test	✓	Logistics data	
Cold start	✓	Products per pallet	6 pc(s)
		Harmonized System (HS) code	85078000
		Total carbon footprint (kg of CO2e)	8408.59
		Other features	
		Packaging content	Web/SNMP Management Card

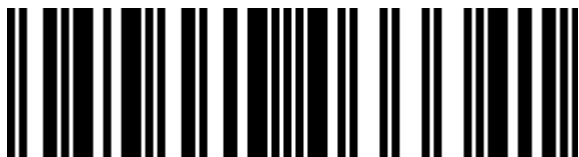


5054444033341



8592978040864



3606481338990

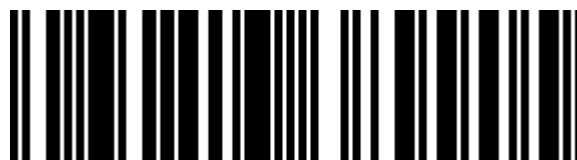

0064813389905



064813389905



7313043011968

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.