



DELL P2424HEB 60.5 cm (23.8") LCD 1920 x 1080 pixels Full HD

Brand : DELL

Product code: DELL-P2424HEB

Product name : P2424HEB

- 60.5cm (23.8") Full HD 1920 x 1080 LED IPS
- 8ms, 16:9, 250cd/m², 1000:1
- USB, HDMI, DisplayPort
- 60.5cm (23.8") Full HD 1920 x 1080 LED IPS, 16:9, 250cd/m², 16.78M, 8ms, 178°/178°, 1000:1

DELL P2424HEB 60.5 cm (23.8") LCD 1920 x 1080 pixels Full HD:

Connect like you're there with a 23.8-inch FHD IPS display built for effortless collaboration. DELL P2424HEB. Display diagonal: 60.5 cm (23.8"), Display technology: LCD, Display resolution: 1920 x 1080 pixels. Megapixel (approx.): 4 MP, Maximum frame rate: 60 fps. RMS rated power: 10 W. Product colour: Black, Screen shape: Flat, Panel mounting interface: 100 x 100 mm. USB version: 3.2 Gen 1 (3.1 Gen 1), USB Power Delivery up to: 90 W




Display		Computer system	
Display diagonal *	60.5 cm (23.8")	Computer system *	✗
Display technology *	LCD	Windows operating systems supported	Windows 10, Windows 11
Panel type	IPS	Mac operating systems supported	MacOS
LED backlight	✓	Performance	
Display resolution *	1920 x 1080 pixels	On Screen Display (OSD)	✓
Display brightness	250 cd/m ²	HDCP	✓
HD type *	Full HD	HDCP version	1.4
Touchscreen *	✗	Power	
Native aspect ratio *	16:9	Power consumption (typical)	15.5 W
Response time	8 ms	Power consumption (max)	195 W
Contrast ratio (typical)	1000:1	Power consumption (standby)	0.3 W
Viewing angle, horizontal	178°	AC input voltage	100 - 240 V
Viewing angle, vertical	178°	AC input frequency	50/60 Hz
Display number of colours	16.78 million colours	Energy efficiency scale	A to G
sRGB coverage (typical)	99%	Energy efficiency class (SDR) *	E
Pixel pitch	0.2745 x 0.2745 mm	Energy consumption (SDR) per 1000 hours *	16 kWh
Display diagonal (metric)	60.47 cm	Power supply type	Internal
Surface hardness	3H	Operational conditions	
Anti-glare screen	✓	Operating temperature (T-T)	0 - 40 °C
Camera		Storage temperature (T-T)	-20 - 60 °C
Built-in camera	✓	Operating relative humidity (H-H)	10 - 80%
Megapixel (approx.)	4 MP	Storage relative humidity (H-H)	5 - 90%
Maximum frame rate	60 fps	Weight & dimensions	
Audio		Display width	538 mm
Built-in speaker(s)	✓	Display depth	60.5 mm
Number of built-in speakers	2		
RMS rated power	10 W		

Design		Weight & dimensions	
Product colour *	Black	Display height	374.6 mm
Screen shape	Flat	Display weight	4.44 kg
VESA mounting *	✓	Width (with stand)	538 mm
Panel mounting interface	100 x 100 mm	Depth (with stand)	185 mm
Bezel width (bottom)	1.72 cm	Height (with stand)	401.6 mm
Bezel width (side)	5.5 mm	Weight (with stand)	6.08 kg
Bezel width (top)	3.63 cm	Packaging data	
Height adjustment	✓	Package weight	8.43 kg
Height adjustment	15 cm	Packaging content	
Pivot	✓	Stand included	✓
Pivot angle	-90 - 90°	Remote control included	✗
Swivelling	✓	Stylus pen	✗
Swivel angle range	-45 - 45°	Power adapter included	✓
Tilt angle range	-5 - 21°	Cables included	AC, DisplayPort, USB Type-A to USB Type-B, USB Type-C to USB Type-C
Ports & interfaces		Sustainability	
HDMI ports quantity *	1	Sustainability compliance	✓
HDMI version	1.4	Sustainability certificates	ENERGY STAR, TCO
DVI port *	✗	Network	
DisplayPorts quantity	1	Ethernet LAN *	✓
USB ports quantity	6	Ethernet LAN (RJ-45) ports	1
USB version	3.2 Gen 1 (3.1 Gen 1)	Wi-Fi *	✗
USB 2.0 Type-B ports quantity	1	Technical details	
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	3	Compliance certificates	RoHS
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	2	Carbon footprint	
Number of USB Type-B upstream ports quantity	1	Total carbon footprint (kg of CO2e)	582
Number of USB Type-C upstream ports quantity	1	Total carbon emissions, standard deviation (kg of CO2e)	152
USB Type-A downstream ports quantity	3	Carbon emissions, manufacturing (kg of CO2e)	421.95
USB Type-C downstream ports quantity	1	Carbon emissions, logistics (kg of CO2e)	40.16
Microphone in	✓	Carbon emissions, energy usage (kg of CO2e)	115.24
USB port *	✓	Carbon emissions, end-of-life (kg of CO2e)	4.66
USB Type-C DisplayPort Alternate Mode	✓	PAIA version	PAIA 1.3.2, 2022
USB Power Delivery (USB PD)	✓		
USB Power Delivery up to	90 W		



5397184657041

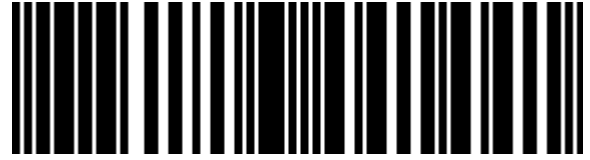

0884116441441



884116441441



5715063699577



5715063699560

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.