



APC Smart-UPS SUA5000RMI5U - 5000VA, 8x C13, 2x C19 outlet, NMC, Rackmount/Tower

Brand : APC

Product code: SUA5000RMI5U


Product name : APC Smart-UPS SUA5000RMI5U - 5000VA, 8x C13, 2x C19 outlet, NMC, Rackmount/Tower

APC Smart-UPS SUA5000RMI5U - 5000VA, 8x C13, 2x C19 outlet, NMC, Rackmount/Tower
APC Smart-UPS SUA5000RMI5U - 5000VA, 8x C13, 2x C19 outlet, NMC, Rackmount/Tower. UPS topology: Line-Interactive, Output power capacity: 5 kVA, Output power: 4000 W. AC outlet types: C13 coupler, C19 coupler, Power plug: Hard Wire 3-wire, AC outlets quantity: 10 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 1632 VAh, Typical backup time at full load: 9.4 min. Form factor: Rackmount/Tower, Product colour: Black, Rack capacity: 5U. Compliance certificates: RoHS, Certification: C-tick, CE, EN 50091-1, EN 50091-2, GOST, GS Mark, VDE, REACH, PEP, EOL



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount/Tower
Output power capacity *	5 kVA	Rack capacity	5U
Output power *	4000 W	Product colour *	Black
Waveform *	Sine	LED indicators	Battery replacement
Input operation voltage (min) *	151 V	Operational conditions	
Input operation voltage (max) *	302 V	Operating temperature (T-T)	0 - 40 °C
Input frequency *	50/60 Hz	Storage temperature (T-T)	-15 - 45 °C
Output operation voltage (min)	220 V	Operating relative humidity (H-H)	0 - 95%
Output operation voltage (max)	240 V	Storage relative humidity (H-H)	0 - 95%
Output frequency regulation	47 - 53 Hz	Operating altitude	0 - 9000 m
Automatic Voltage Regulation (AVR)	✓	Non-operating altitude	0 - 15000 m
Surge energy rating	480 J	Certificates	
Hold time (min)	2 ms	Compliance certificates	RoHS
Hold time (max)	4 ms	Certification	C-tick, CE, EN 50091-1, EN 50091-2, GOST, GS Mark, VDE, REACH, PEP, EOL
Number of output phases	1	Packaging content	
Efficiency	96%	Rack mount kit	✓
Noise level	53 dB	Cables included	RS-232
Surge protection	✓	Management card included	✓
Audible alarm(s)	✓	Manual	✓
Auto-restart	✓	Quick installation guide	✓
Ports & interfaces		Weight & dimensions	
AC outlet types	C13 coupler, C19 coupler	Width	483 mm
Power plug	Hard Wire 3-wire	Depth	660 mm
AC outlets quantity	10 AC outlet(s)	Height	222 mm
Number of output IEC jumpers	4	Weight	97.7 kg
SmartSlot	✓		
SmartConnect port	✗		

Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Software CD	✓
Battery capacity	1632 VAh	Package width	610 mm
Typical backup time at full load	9.4 min	Package depth	762 mm
Typical backup time at half load	26.7 min	Package height	635 mm
Battery life (max)	5 year(s)	Package weight	106.8 kg
Battery recharge time	3 h	Logistics data	
Hot-swap battery	✓	Products per pallet	4 pc(s)
Automatic battery test	✓	Harmonized System (HS) code	85078000
Cold start	✓	Total carbon footprint (kg of CO2e)	4487.43
		Products per master (outer) case	1 pc(s)
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Web/SNMP Management Card

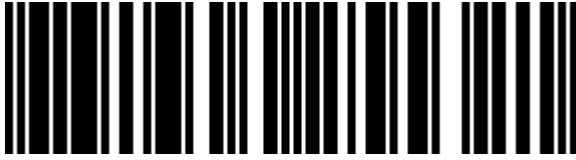

0731304255321



731304255321

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.